



	D200	D325
	200 l	325 l
1:18	11 kg	18 kg
1:20	10 kg	16 kg

Features

- Precise residual moisture measurement
- Fast drying times
- Low energy consumption
- High efficiency through axial-radial air flow
- Convenient loading/unloading through large door
- Optimised waste heat recovery
- Intuitive touch operation with 4.3" colour display
- Expert control
- 24 languages
- 18 standard drying programmes, time drying
- Time preset
- Crease protection
- Reversing drum
- Stainless steel drum
- Maintenance-free direct drive
- Robust construction for high durability
- Powder-coated steel housing, matt grey
- Quietness <60 db(A)
- Fluff filter drawer
- Removable of bottom front panel to access with fork lift

Options

- Expert+ control
- Integrated prepaid card system
- Potential-free contact for external ventilation control
- Central fresh air intake 200 mm
- Central fresh air intake 160 mm
- Air vent 160 mm
- Door hinge on the left ex works; changeover is possible on site
- Fluff filter drawer, lockable
- Machine plinth 270 mm
- Anthracite or chrome steel finish

Features and benefits



- Fast drying time
D200: 32 min / D325: 34 min
- Energy-efficient
- Durable and robust
- Low-maintenance



- Swiss made
- Intuitive operation
- profiClean and wetClean programmes
- Quiet



- Product options

proLine D200 / D325 technical data

Company or brand name		Schulthess	Schulthess
Appliance type		Dryer	Dryer
Type or sales description	proLine	D200	D325
Product No		4253	4255

Eigenschaften

Load (1:18)	kg	11	18
Load (1:20)	kg	10	16
Drum capacity	l	200	325
Drum diameter	mm	728	728
Drum depth	mm	480	780
Diameter of filling aperture	mm	580	580
Evaporation rate	l/min	0,17	0,25
Drying rate	kg/h	20	32
Energy consumption ¹⁾	kWh / kWh/kg	6,25 / 0,57	10,0 / 0,56

Programmes

Programme duration ¹⁾	min	32	34
----------------------------------	-----	----	----

Ventilation installation

Extraction rate (max.)	m³/h	480	840
Air outlet	Ø mm	200	200
Cable resistance on site	max. Pa	200	200

Dimensions

Width	mm	790	790
Height	mm	1350	1350
Height with plinth	mm	1620	1620
Depth	mm	900	1200

Electric connection

Supply voltage	V	400 3N~	400 3N~
Connected load	kW	15	21,2
Heat output	kW	14,4	20,6
Performance Drive	kW	0,6	0,6
Fuse protection	AT	25	32


Safety and maintenance

Complies with Swiss safety regulations		yes	yes
Complies with the European Machinery Directive		2006 / 42 / EC	2006 / 42 / EC
Warranty	Year	1	1
Maintained by		authorized dealer	authorized dealer
Name and address of manufacturer		Schulthess Maschinen AG CH-6330 Cham ZG	Schulthess Maschinen AG CH-6330 Cham ZG
Country of origin		Switzerland	Switzerland

Explanations • available – not available

1) Cotton cabinet dry, output moisture 47 %, residual moisture 0%

- 1 Electrical connection
- 2 Main switch
- 3 Emergency stop button
- 4 Type plate
- 5 Air outlet

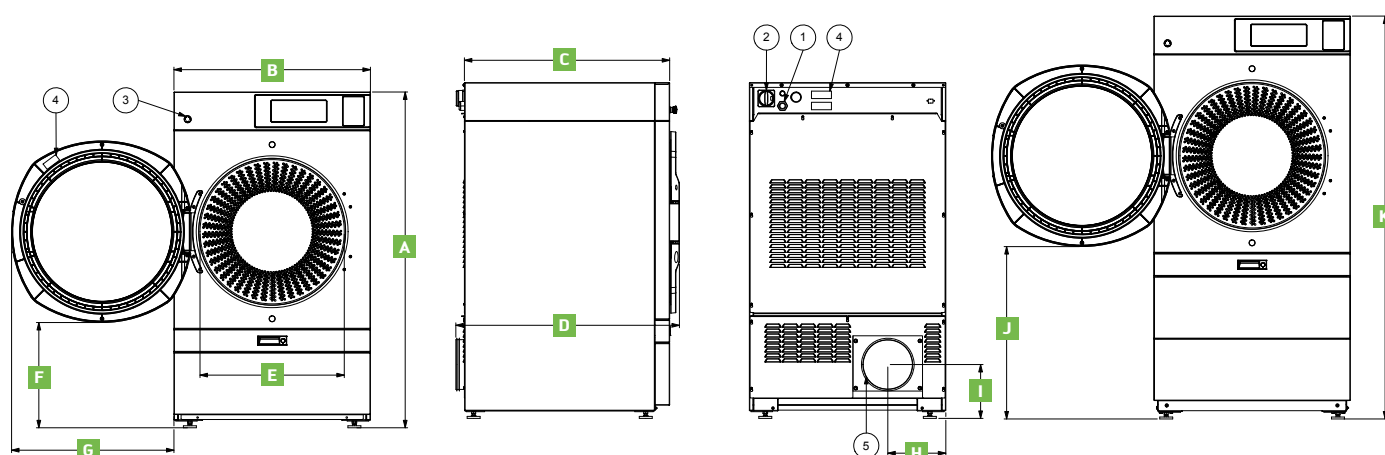

Dimensions

	A	B	C	D	E	F	G	H	I	J	K	Weight (kg)
D200	1350	790	825	900	580	425	655	235	220	695	1620	196
D325	1350	790	1125	1200	580	425	655	235	220	695	1620	233