



	W65	W80	W100
	65 l	80 l	100 l
1:9	7 kg	9 kg	11 kg
1:10	6.5 kg	8 kg	10 kg

Equipment

- Freestanding, high-speed washing machine
- Powder-coated steel housing, matt grey
- Stainless steel drum and outer drum
- Intuitive operation with 4.3-inch colour display
- Control system «Expert»
- Ergonomic detergent dispenser
- Laundry trap protection
- Convenient loading/unloading through large doors
- Hot water connection
- Drain valve
- Time preselection up to 7 weekdays
- 24 languages
- Autoclean

Options

- Control system «Expert+»
- Stainless steel housing
- USB interface
- Connection for 8 liquid detergent dosing pumps
- Machine plinth 280 mm
- Machine plinth with lint filter drawer
- Drain pump
- Machine hygiene monitoring via USB
- PrePaid Card System (RFID)
- Anthracite or chrome steel finish

Property and benefits



- Compact, robust and durable quality product
- Low-maintenance, saves costs
- Environmentally friendly WetClean



- Fast washing cycles
- Proficlean
- Freely programmable washing programmes
- Intuitive control panel
- Simple, safe operation



- Hygiene safety
- Disinfection programmes
- Hygiene monitoring
- Perfect washing results

Technical data proLine W65 / W80 / W100

Company or brand name		Schulthess		
Device type		Washing machine		
Type or sales description	proLine	W65	W80	W100
Product no.		4201.1	4202.1	4203.1

Properties

Fill ratio (1:9)	kg	7	9	11
Filling quantity (1:10)	kg	6,5	8	10
Drum volume	l	65	80	100
Drum opening	Ø mm	355	355	355
Drum diameter	mm	517	517	517
Drum depth	mm	302	372	464
Spin speed	rpm	1200	1200	1200
g-factor		416	416	416
Residual moisture	%	46	46	46
Programme duration cold water connection (min.) ^{2)/ 5)}		52	55	57
Programme duration hot water connection 70 °C (min.) ^{2)/ 5)}		46	47	48
Energy consumption ^{3)/ 4)/ 5)}	kWh	1,1 / 0,34	1,5 / 0,42	1,7 / 0,42
Water consumption ^{2)/ 5)}	l	56	67	90

Electrical installation

Supply voltage	V	400 3N~ / 50 Hz	400 3N~ / 50 Hz	400 3N~ / 50 Hz
Connected load	kW	9,4	9,4	9,4
Electric heating	kW	9,0	9,0	9,0
Drive	kW	1,0	1,0	1,0
Protection	AT	16	16	16

Sanitary installation

Water pressure on site	MPa	0,15 – 1,0	0,15 – 1,0	0,15 – 1,0
Cold water hard inflow ¾-inch	l/min	> 13	> 13	> 13
Hot water supply from central boiler max. 70 °C ¾-inch	l/min	> 13	> 13	> 13
Drain quantity drain valve Ø 50 mm	l/min	260	260	260
Drain pump Ø 22 mm	l/min	32	32	32


Control system

	Expert / Expert+	Expert / Expert+	Expert / Expert+
Standard programmes	•/•	•/•	•/•
24 programmes, freely programmable	•/•	•/•	•/•
ProfiClean sets	-/•	-/•	-/•
Disinfection programmes	-/•	-/•	-/•
WetClean programmes	-/•	-/•	-/•

Explanations:

– not available • available ²⁾Cotton 60 °C without pre-wash ³⁾Cotton 60° prg. cold water ⁴⁾Cotton 60° prg. hot water 70° ⁵⁾Drain valve

- 1 Main switch
- 2 Electrical connection
- 3 Water connection
- 4 Overflow / Venting
- 5 Connection for liquid detergent
- 6 Drain pipe

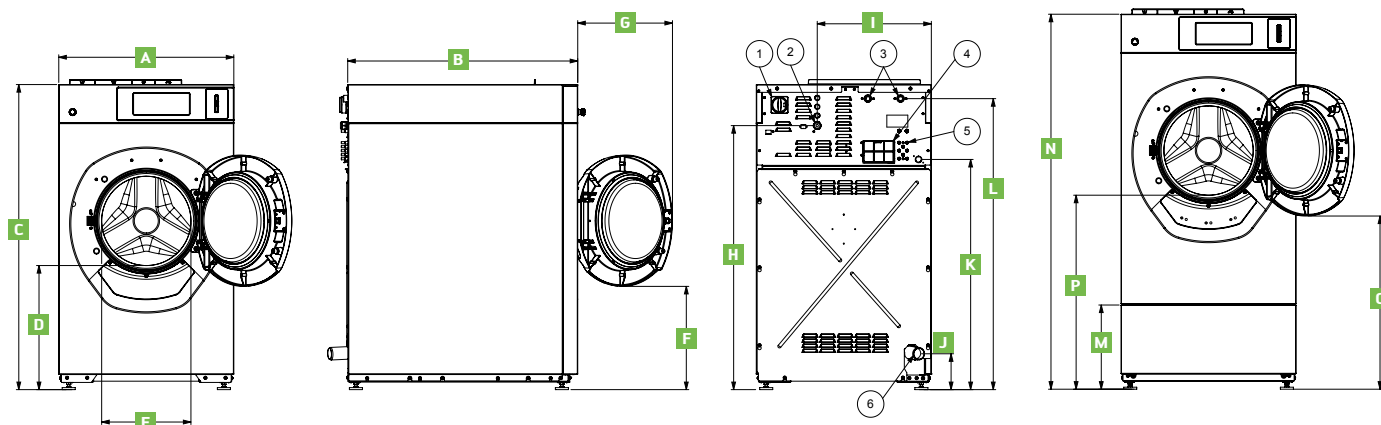

Dimensions

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Weight (kg)
W65	696	820	1210	500	355	410	380	1050	455	150	915	1160	330	1490	690	780	200
W80	696	820	1210	500	355	410	380	1050	455	150	915	1160	330	1490	690	780	210
W100	696	915	1210	500	355	410	380	1050	455	150	915	1160	330	1490	690	780	220